

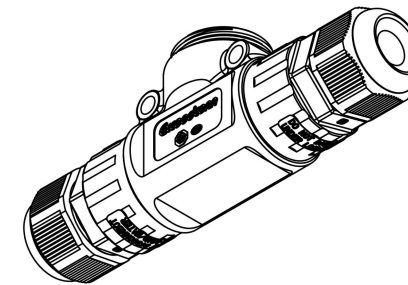
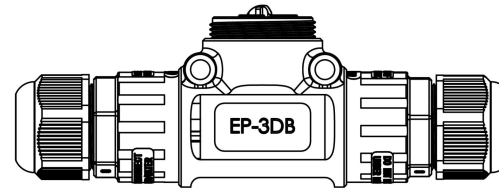


2301232002_AC T Connector(3C,17.5A)


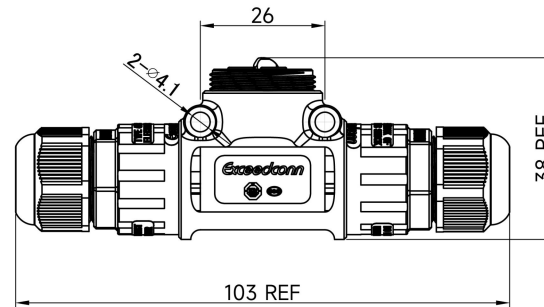


| CHANGE NO. | CHANGE CONTENTS | REV. | NAME/DATE |
|------------|-----------------|------|-----------|
| | | | |
| | | | |
| | | | |



Packing

Wrench



Notes:

Electrical

1. Rated Voltage: 250V;
2. Rated Current: 17.5A;
3. Contact Resistance: ≤10mΩ;
4. Insulation Resistance: ≥500MΩ;

Mechanical:



1. Mating Cycle: ≥500;
2. Cable Retention Force: ≥100N;
3. Sealing Size: φ11.5mm;
4. Cable O.D: 9.5~11.5mm;
5. Wire Size: 1.5mm²;

Environmental:

1. Waterproof Rate: IP68;
2. Application Temperature: -40°C~+85°C;
3. Flaming Level: UL94-V0;

Others:

1. Type No.: EP-3DB;
2. Packaging: Blank Cartons

| TOLERANCES UNLESS OTHERWISE SPECIFIED | | MATERIAL | |  APsystems ALTENERGY POWER |
|---------------------------------------|---------------|---|--------------------------|---|
| X: ±1.00 | X*: ±3.00° | | | |
| .X: ±0.50 | .X*: ±2.00° | | | |
| .XX: ±0.20 | .XX*: ±1.00° | | | |
| .XXX: ±0.10 | .XXX*: ±0.50° | | | |
| DWN. | UNIT mm |  | NAME | |
| CHK. | SHEET OF REV. | | AC T Connector(3C,17.5A) | |
| | | | DRAWING NO. | |